

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000438

International filing date: 09 February 2005 (09.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0404793.2
Filing date: 03 March 2004 (03.03.2004)

Date of receipt at the International Bureau: 01 April 2005 (01.04.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



INVESTOR IN PEOPLE


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

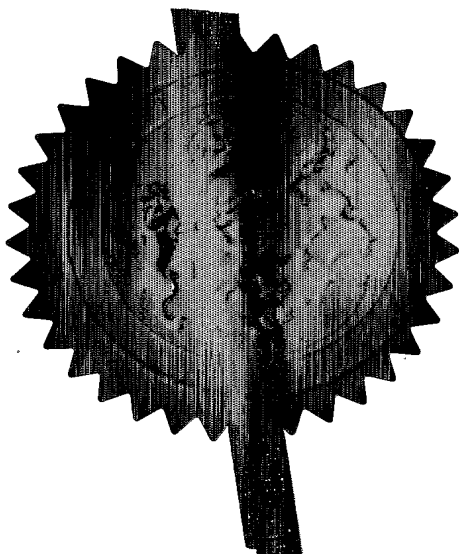


Signed

Dated

15 March 2005



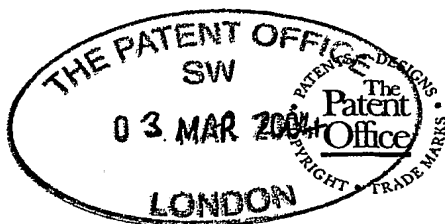

04MAR04 E878025-1 000173
P01/7700 0.00-0404793.2 NONE

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

10002

2. Patent application number

(The Patent Office will fill this part in)

03 MAR 2004

0404793.2

3. Full name, address and postcode of the or of each applicant (underline all surnames)

0645 49 38001

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

BP CHEMICALS LIMITED
CHERTSEY ROAD
SUNBURY-ON-THAMES
MIDDLESEX
TW16 7BP
UNITED KINGDOM

4. Title of the invention

PROCESS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Patents ADP number (if you know it)

BROOKE, Caron
BP INTERNATIONAL LIMITED
PATENTS & AGREEMENTS
CHERTSEY ROAD
SUNBURY-ON-THAMES
MIDDLESEX
TW16 7LN
UNITED KINGDOM

06454938001

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f)

Number of earlier UK application

Date of filing
(day / month / year)

8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request? YES

Answer YES if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

Otherwise answer NO (See note d)

Patents Form 1/77

9. Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form

Description 9

Claim(s) -

Abstract -

Drawing(s) -

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for a preliminary examination and search (Patents Form 9/77)

Request for a substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

BROOKE, Caron

Date 03.03.04

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom

01932 762654

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

PROCESS

The present invention relates in general to the production of a carbonylation product by the carbonylation of an alcohol and/or a reactive derivative thereof and, in particular, to the production of a carbonylation product by the vapour phase carbonylation of an alcohol and/or a reactive derivative thereof in the presence of water and a heterogeneous carbonylation catalyst.

Acetic acid may be produced by the rhodium-catalysed, iodide-promoted carbonylation of methanol in a homogeneous liquid-phase reaction medium, such as described, for example in US 3,769,329. The rhodium-catalysed, iodide-promoted liquid phase carbonylation of methanol is a well-known process and is operated on a commercial scale. The desirability of employing heterogeneous carbonylation catalysts for the purpose of facilitating product separation from the catalyst has also been recognised. Heterogeneous carbonylation catalysts and their use are described in a number of patent publications including, for example WO 98/57918, EP 0885870 A1 and EP 0353722 A2.

WO 98/57918 describes a process for the production of a carboxylic acid by the carbonylation of an alcohol and/or a reactive derivative thereof in the liquid phase over a heterogeneous carbonylation catalyst comprising a group VIII noble metal species on a polymeric resin having functional groups selected from nitrogen containing heterocycles. Hydrogen is added to the carbonylation to reduce leaching of the active catalytic species from the support material during carbonylation.

EP 0885870 A1 describes a process for the production of carboxylic acid and/or carboxylic acid anhydrides which comprises contacting an alcohol and/or a carboxylic

acid ester, optionally water, a first hydrocarbyl halide and/or a hydrocarbyl ether reactant and a second hydrocarbyl halide promoter, with carbon monoxide in the presence of a catalyst comprising an insoluble imidazole-containing resin supporting a Group VIII metal species. The process may be performed in the liquid or the vapour phase.

5 EP 0353722 A2 describes a process for the vapour phase carbonylation of one or more alcohols, ethers or ether alcohols to esters and, optionally, to carboxylic acids over a solid catalyst comprising a polyoxometalate anion in which the metal is at least one taken from Group V and VI of the periodic table, such as Mo, W, V, Nb, Cr and Ta, complexed with at least one Group VIIIA cation, such as Fe, Ru, Os, Co, Rh, Ir, Ni, Pd
10 and Pt.

US 6,127,432 describes processes for the conversion of a feedstock comprising carbon monoxide and hydrogen to a product stream comprising at least one of an ester, acid, acid anhydride and mixtures thereof. US 6,127,432 also describes a process for converting an alcohol, ether and/or ether alcohol to oxygenated products such as esters,
15 acids, acid anhydrides and mixtures thereof, which process may be conducted in the vapour phase over a heterogeneous alcohol carbonylation catalyst selected from a solid superacid, clay, zeolite or molecular sieve. The alcohol carbonylation catalysts include heteropolyacids comprising a polyoxometalate anion in which the a metal, or mixture of metals, selected from Groups 4, 5, 6 and 7 metals is complexed with a cation from a
20 member of Group 7, 8, 9 10 and/or 11 metals, such as Fe, Ru, Os, Co, Rh, Ir, Ni, Pd and Pt. A preferred heteropolyacid comprises $MW_{12}PO_{40}$, wherein M is Ir, Ru, Rh, Pd and combinations thereof. US 6,127,432 states that the stability of the heterogeneous alcohol carbonylation catalyst is improved by use of hydrogen or a feedstock containing hydrogen in the carbonylation process.

25 We have now found that addition of water to the feed in a vapour phase, heterogeneous carbonylation process utilising an heteropolyacid catalyst comprising one or more metal cations gives improved catalyst activity.

Accordingly, the present invention provides a carbonylation process for the production of a carbonylation product by contacting carbon monoxide with an alcohol
30 and/or reactive derivative thereof in the vapour phase using an heterogeneous heteropolyacid catalyst comprising one or more metal cations selected from Cu, Fe, Ru, Os, Co, Rh, Ir, Ni, Pd and Pt, characterised in that there is present in the feed to the

carbonylation process at least 0.5wt% water.

The present invention also provides for the use of water at a concentration of at least 0.5wt% in the feed to a carbonylation process to increase the activity of an heterogeneous heteropolyacid catalyst comprising one or more metal cations selected from Cu, Fe, Ru, Os, Co, Rh, Ir, Ni, Pd and Pt in the production of a carbonylation product by contacting carbon monoxide with an alcohol and/or reactive derivative thereof in the vapour phase over said catalyst.

Preferably, the water in the feed to the carbonylation process is present at a concentration of at least 1wt%, such as at least 2wt%. More preferably, the water in the feed to the carbonylation process is present at a concentration of at least 5wt%.

Preferably, the water in the feed to the carbonylation process is present at a concentration of up to 20wt% water, such as up to 15wt% water. Most preferably, the water in the feed to the carbonylation process is present at a concentration of 5 to 15wt%.

By "heteropolyacid catalyst comprising one or more metal cations selected from Cu, Fe, Ru, Os, Co, Rh, Ir, Ni, Pd and Pt", as used herein, is meant an heteropolyacid in which one or more of the hydrogen ions of the free heteropolyacid has been substituted by at least one of the described cations (hereinafter a substituted heteropolyacid). In addition to the one or more metal cations selected from Cu, Fe, Ru, Os, Co, Rh, Ir, Ni, Pd and Pt, the heteropolyacid may comprise further cations, such as "residual" hydrogen ions and/or alkali metal cations selected from Li, Na, Rb and Cs.

Typically, the heteropolyacid anion comprises 2-18 oxygen-linked polyvalent metal atoms, which are known in the art as peripheral atoms. These peripheral atoms surround one or more central atoms in a symmetrical manner. The peripheral atoms are usually one or more of molybdenum, tungsten, vanadium, niobium, chromium and tantalum, but may be or may include other metals. The central atoms are usually silicon or phosphorus but can comprise any one of a large variety of atoms from Groups I-VIII in the Periodic Table of elements. These include, for instance, cupric ions; divalent beryllium, zinc, cobalt or nickel ions; trivalent boron, aluminium, gallium, iron, cerium, arsenic, antimony, phosphorus, bismuth, chromium or rhodium ions; tetravalent silicon, germanium, tin, titanium, zirconium, vanadium, sulphur, tellurium, manganese nickel, platinum, thorium, hafnium, cerium ions and other rare earth ions; pentavalent

phosphorus, arsenic, vanadium, antimony ions; hexavalent tellurium ions; and heptavalent iodine ions. Such heteropolyacids are also known as "polyoxoanions", "polyoxometallates" or "metal oxide clusters". The structures of some of the well known anions are named after the original researchers in this field such as, for example, the structures known as Keggin, Wells-Dawson and Anderson-Evans-Perloff structures.

The preferred heteropolyacids for use in the process according to the present invention comprise one or more of molybdenum, tungsten, vanadium, niobium, chromium and tantalum as the peripheral atoms and silicon or phosphorus as the central atoms.

Typically the substituted heteropolyacid will comprise 1 to 6 % by weight of the substituent metal cation, preferably 3 to 5% by weight. The substituted heteropolyacids usually have a high molecular weight, for example, in the range from 2000 to 8000, preferably in the range 2000 to 4000, and can include dimeric complexes.

Preferably, the substituted heteropolyacid is selected from substituted silicotungstic acids, silicomolybdic acids, phosphotungstic acids, phosphomolybdic acids, such as substituted heteropolyacids of the following free acids:

12-tungstophosphoric acid $H_3[PW_{12}O_{40}].xH_2O$

12-molybdophosphoric acid $H_3[PMo_{12}O_{40}].xH_2O$

12-tungstosilicic acid $H_4[SiW_{12}O_{40}].xH_2O$

12-molybdosilicic acid $H_4[SiMo_{12}O_{40}].xH_2O$

Preferably, the metal cation is selected from one or more of rhodium, iridium and copper, and in particular is rhodium or iridium. Rhodium is the most preferred metal cation.

The substituted heteropolyacid is preferably supported. Suitably, the support may be selected from oxide supports such as silica, silica /aluminas, zeolites, clays, diatomaceous earths, titania and alumina. Other non-oxide supports that can be used include silicon carbide, organic polymers such as crosslinked polystyrenes and carbons. The support, such as a siliceous support, is suitably in the form of granules, beads, globules, extrudates or pellets.

Where the substituted heteropolyacid is supported the substituted heteropolyacid is typically present at a loading of 20-70% by weight of the total weight of the supported substituted heteropolyacid, that is, the substituted heteropolyacid forms 20-70% by

weight of the total weight of the substituted heteropolyacid and the support. Preferably, where the substituted heteropolyacid is supported, the substituted heteropolyacid is present at a loading of 30-65% by weight of the total weight of the supported substituted heteropolyacid.

5 Preferably, the alcohol is an aliphatic alcohol having 1 to 12 carbon atoms, preferably 1 to 6 carbon atoms, including methanol, ethanol, propanol, isopropanol, the butanols, pentanols and hexanols. A preferred alcohol is methanol..

Reactive derivatives of the alcohol which may be used as an alternative to, or in addition to, the alcohol include dialkyl ethers, esters of the alcohol and alkyl halides.
10 Suitable reactive derivatives of methanol, for example, include methyl acetate, dimethyl ether and methyl iodide. A mixture of an alcohol and a reactive derivative thereof, for example a mixture of methanol and methyl acetate, may also be employed.

The carbonylation product is a carboxylic acid and/or the corresponding carboxylic ester. Thus, where methanol is employed as the alcohol feed, the
15 carbonylation product comprises acetic acid and/or methyl acetate.

Water may be produced during the carbonylation process as a by-product of esterification. This water may be recycled to the reactor. Generally, it will be necessary to add "fresh" water to the carbonylation reaction feed in addition to any water that may be recycled in order to maintain the desired concentration of water in the feed to the
20 reactor.

The carbon monoxide reactant may be essentially pure or may contain impurities such as carbon dioxide, methane, nitrogen, noble gases and C₁ to C₄ paraffinic hydrocarbons.

The carbon monoxide (CO) may be present in the reaction at any suitable partial
25 pressure, such as a partial pressure of at least 0.1 bar. More particularly, the CO may be fed to the reactor in a suitable molar ratio to the alcohol feed (and/or reactive derivative), preferably at a CO to alcohol molar ratio of at least 1:1, such as at least 5:1, and/or up to 20:1, most preferably in the range 5:1 to 15:1.

In a preferred embodiment of the present invention, the carbonylation reaction
30 may be performed in the presence of hydrogen. The hydrogen reactant may be fed to the reactor as an essentially pure hydrogen feed or the hydrogen feed stream may contain impurities, such as carbon oxides and nitrogen. Where hydrogen is used in the process

of the present invention, it is especially desirable to use synthesis gas as a source of both the hydrogen and the carbon monoxide.

The hydrogen, when present, may be present in the reaction at any suitable hydrogen concentration, such as at a partial pressure of at least 0.1 bar, and is especially fed, either separately from or combined with carbon monoxide, such that the hydrogen to carbon monoxide molar ratio in the reactor is at least 1:20, such as 1:20 to 20:1, most preferably in the range 1:10 to 10:1.

The process of the invention may be operated at below atmospheric pressure, but is preferably operated at a total pressure in the range from 1 to 100 barg, preferably from 1 to 20 barg.

The process is suitably performed at a temperature in the range from 100 to 300°C, the practical upper operating temperature being dependant on the thermal stability of the catalyst. Preferably the temperature is in the range 150 to 250°C, most preferably in the range 200 to 250°C.

The process is suitably performed by contacting the reactants with the catalyst at a gas hourly space velocity (GHSV) in the range from 100 to 10000 h⁻¹, Preferably the GHSV is in the range 500 to 5000 h⁻¹.

The process may be operated as a batch or continuous process, preferably as a continuous process.

The invention will now be illustrated by reference to the following examples.

Examples

Catalyst A preparation

A rhodium-substituted heteropolyacid catalyst was prepared as follows.

RhCl₃.H₂O (Aldrich, FW=209.26, 0.774 g) was dissolved in methanol (*ca* 200ml) with stirring for 30 minutes. After stirring of the rhodium mixture, 12-tungstophosphoric acid (H₃[PW₁₂O₄₀].xH₂O, Aldrich, FW 2280, 10.657 g) was added with stirring for 1 hour. 6.416g of silica (Grace, grade G57, FW=60, 1-2 mm particle size) was then added. The solution was then stirred for 4 hours. After 4 hours the flask was transferred to a rotary evaporator and the methanol removed under reduced pressure of 337 mbar for 1 hour to yield a red/orange solid. This solid was crushed using a mortar and pestle and then sieved to give a catalyst of particle size 0.5-1.0 mm.

Catalyst testing procedure

A number of experiments were carried out at varying water concentrations in the feed and at two different gas hourly space velocities (GHSV).

5 Examples 1 to 3

5 ml (approx. 5g) of catalyst A was charged to a quartz tube reactor with a supportive frit positioned in the middle of the tube. The reactor was filled borosilicate glass beads above the frit. The reactor was positioned in the middle of a vertical furnace with insulating lagging at the top and bottom of the furnace.

- 10 Carbon monoxide and methanol were fed to the quartz reactor in a molar ratio of CO : MeOH of 9 : 1. Carbon monoxide at a gas flow rate of 150 ml/min was fed into the top of the reactor *via* a flow meter. Once stable flow was achieved after 2-3 minutes, the furnace was heated gradually (5°C/min) to 100°C. The furnace remained at 100°C for 20 min to remove the majority of the water from the catalyst after which time the
- 15 furnace was heated gradually (5°C/min) to 230°C. The system was left at temperature for 15 min to fully equilibrate and then liquid methanol and water (where used) (see Table 1 below for liquid feed flow parameters) were fed to the top of the reactor *via* a syringe pump. The liquid and gaseous reactants passed down through the reactor and into a liquid trap. The liquid trap comprised a coil condenser immersed in an ice-bath,
- 20 where the liquid products were isolated. The gaseous products were vented *via* a T-piece containing a septum for taking gas samples *via* a gas syringe. Typically, the liquid trap was changed every hour and a gas sample was taken during the middle of each time segment. Liquid samples were analysed on a gas chromatogram equipped with a boiling point column and a TCD detector. Gas samples were analysed on a four-column gas
- 25 chromatogram. Post-reaction the system was completely purged with nitrogen before removing the reactor from the rig. The GHSV was 1800/h. The products of the reaction were acetic acid and methyl acetate.

The results of Examples 1 to 3 are given in Table 2 below.

30 Experiment A

The catalyst testing procedure was repeated as for Examples 1 to 3 except that no water was added to the carbonylation reaction feed. The results of Experiment A are

given in Table 2 below.

Examples 4 to 5

- 5 The catalyst testing procedure was repeated as for Examples 1 to 3 except that a GHSV of 900/h and 10 ml of catalyst A was used. The results of Examples 4 to 6 are given in Table 3 below.

Experiment B

- 10 The catalyst testing procedure was repeated as for Examples 4 to 5 except that no water was added to the carbonylation reaction feed. The results of Experiment B are given in Table 3 below.

Table 1: Liquid feed parameters

Water in Feed (wt%)	MeOH Feed Rate (ml/h)	H ₂ O Feed Rate (ml/h)
0	1.60	0.00
5	1.52	0.08
10	1.44	0.16
15	1.36	0.24

15 **Table 2: Results for Examples 1 to 3 and Experiment A**

Conditions: 230°C, 1 barg, reaction time of 3 hours.

Example/Experiment	Water Level (wt%)	MeOH conv. (%)	Product selectivity (%)
A	0	17.8	94.0
1	5	22.7	95.8
2	10	32.8	95.9
3	15	29.3	95.5

Table 3: Results for Examples 4 to 5 and Experiment B

Conditions: 230°C, 1 barg, reaction time of 3 hours.

Example/Experiment	Water Level (wt%)	MeOH conv. (%)	Product selectivity (%)
B	0	22.0	98.1
4	5	23.0	98.9
5	10	23.8	98.9

- 5 The results shown in Tables 2 and 3 demonstrate that by increasing the amount of water in the feed to the carbonylation reaction improved methanol conversion may be achieved. An increase in product selectivity is also observed in the presence of water co-feed compared to its absence. The increases in activity and selectivity are also more pronounced in the Experiments at higher space velocities in the reactor. Thus, in
- 10 Example 2, for example, shows that the methanol conversion is increased from 17.8 wt% with no water co-feed to 32.8wt% at a 10wt% water co-feed, whilst the corresponding product selectivity increases from 94.0% to 95.9%.

15

20

25

